

Interflon Single Point Lubricator

One-point automatic lubrication system

A one-point lubrication system for every possible application. Due to the choice of 5 different content amounts there is always a Single Point Lubricator for your lubrication point.



Ask our Technical Adviser about the possible options.

Efficient

- Very reliable
- Easy to check operation
- Simple to install
- 24/7 lubrication for your lubrication points
- Always the right amount of grease
- Very many possible applications
- Can be combined with the Single Point Lubricator Impulse for a higher final pressure (60, 125 and 250 ml)

Environmentally-friendly

- Fully recyclable
- Refillable to a maximum of 3x use
- No waste of grease

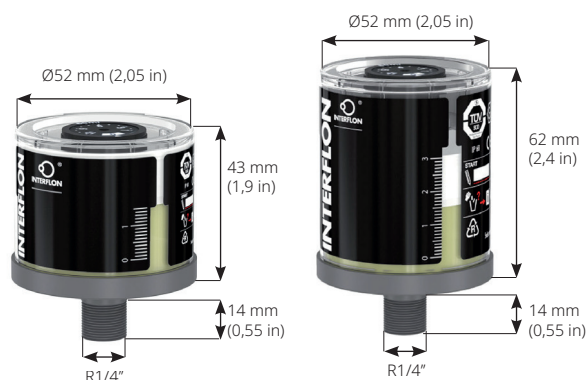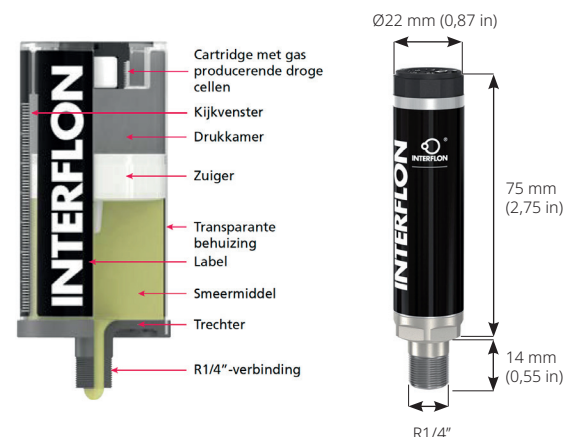

Advantages

- Easy to install
- Adjustable from 1 to 12 months
- Complete range of accessories
- Can be installed in all possible positions, even under water
- Compact format
- No pollution around lubrication point
- No pollution by the grease due to dirty grease nipples with manual lubrication, for example
- Extensive operating temperature options -20°C to +55°C
- Saves time and is reliable
- Available in 15, 30, 60, 125 and 250 ml version

For more information or for a demonstration, call +31(0)165 55 45 11

MicPol® and Interflon® are registered trademarks of Interflon BV

www.interflon.com

Interflon Single Point Lubricator

One-point automatic lubrication system

Technical information

Product	Automatic 1-point oil and grease lubrication system
Power supply	Hydrogen gas-producing dry cell
Operating pressure	Max. 5 bar
Setting	Stepless 1-12 months (with standard conditions)
Operating temperature	-20 °C to +55 °C ambient temperature
Operation/use	Dispenser can be mounted in every position, even under water. Important: do not expose to direct heat.
Housing protection	IP68 (dust-proof and waterproof)
Period of use	Activation within 2 years after production date
Storage temperature	Recommended: 20°C ± 5 °C (65°F ± 5°F)

Single Point Lubricator	15 ml	30 ml	60 ml	125 ml	250 ml
Supplier	Interflon	Interflon	Interflon	Interflon	Interflon
Weight full	~ 36 g	~ 82 g	~ 115 g	~ 190 g	~ 335 g
Weight empty	~22,5 g	~ 55 g	~ 60 g	~ 75 g	~ 111 g
Refill	refillable	refillable	refillable	refillable	refillable

Article number Description

7201	Interflon Single Point Lubricator 15ml
7202	Interflon Single Point Lubricator 30ml
7203	Interflon Single Point Lubricator 60ml
7204	Interflon Single Point Lubricator 125ml
7205	Interflon Single Point Lubricator 250ml
7206	Refill Single Point Lubricator-cartridge 15 ml
7207	Refill Single Point Lubricator-cartridge 30 ml
7208	Refill Single Point Lubricator-cartridge 60 ml
7209	Refill Single Point Lubricator-cartridge 125 ml
7210	Refill Single Point Lubricator-cartridge 250 ml
7211	Single Point Lubricator non-return valve for oil
7212	Interflon Single Point Lubricator filling set



For more information or for a demonstration, call +31(0)165 55 45 11

MicPol® and Interflon® are registered trademarks of Interflon BV

www.interflon.com